



B45

The ideal sliding door

The B45 series offers robust sliding doors and windows at an attractive price. In addition to the standard duo-rail, the wide range of products also comprises a mono-rail with a minimal view width for the fixed part. The tri-rail expands the range of available openings to include openings with up to 6 parts.


The system range also includes a large wing profile, enabling large wing areas and a lift sliding version. The wing is lifted up, separating the brush seals from the frame so that the wing can be moved more easily and with even less force.




THE IDEAL SLIDING DOOR B45

A wide range of available openings


Mono-rail or duo-rail:

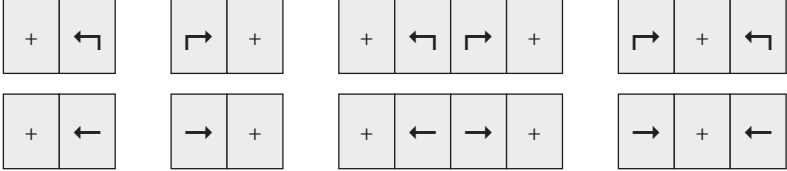


Duo-rail:

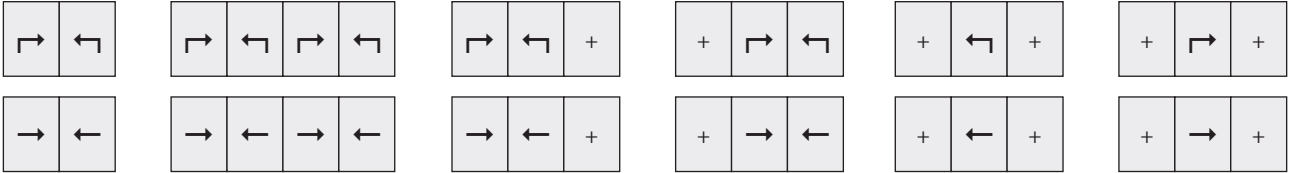


Tr-rail:

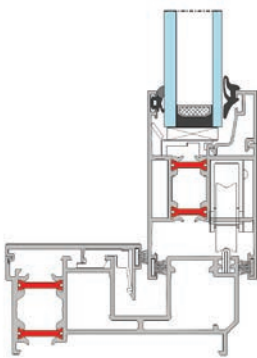

B45 MONO-RAIL

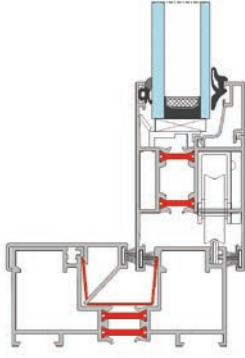

B45 DUO-RAIL

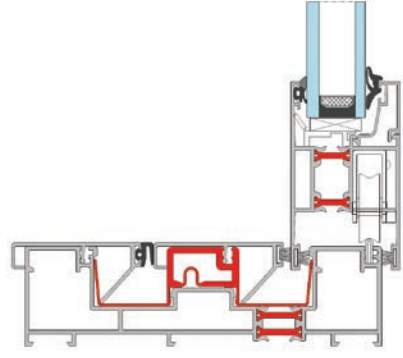

B45 TRI-RAIL

B45 PROPERTIES

		SKG Report 01.172	
Standard insulation renovation		Burglar resistance	WK2 / RC2 (NEN 5096 / ENV1627)
Outer-frame glazing	4 mm - 31 mm	Uw insulation value (4,5 x 2,3 m)	1,66 W/m²K (Double glazing Ug=1,0; ψ=0,069)*
Wing glazing	4 mm - 31 mm		
Outer-frame installation depth	89 mm - 148 mm	Water resistance	8A (NBN EN 12208)
Wing installation depth	45 mm	Airtightness	3 (NBN EN 12207)
Fibreglass-reinforced polyamide strips		Wind resistance	C4 (NBN EN 12210)

* All other combination/result values are indicative and may not incur liability

